




K120-EX FULLY RUGGED TABLET

- ATEX/IECEx Zone2/22 certified for hazardous locations
- 11세대 Intel® Core™ i7 / i5 vPro® 프로세서
- 12.5" FHD LumiBond® display with Getac sunlight readable technology (1,200 nits)
- Enhanced enterprise security with optional Intel vPro®, Windows Hello face-authentication camera and multi-factor authentication options

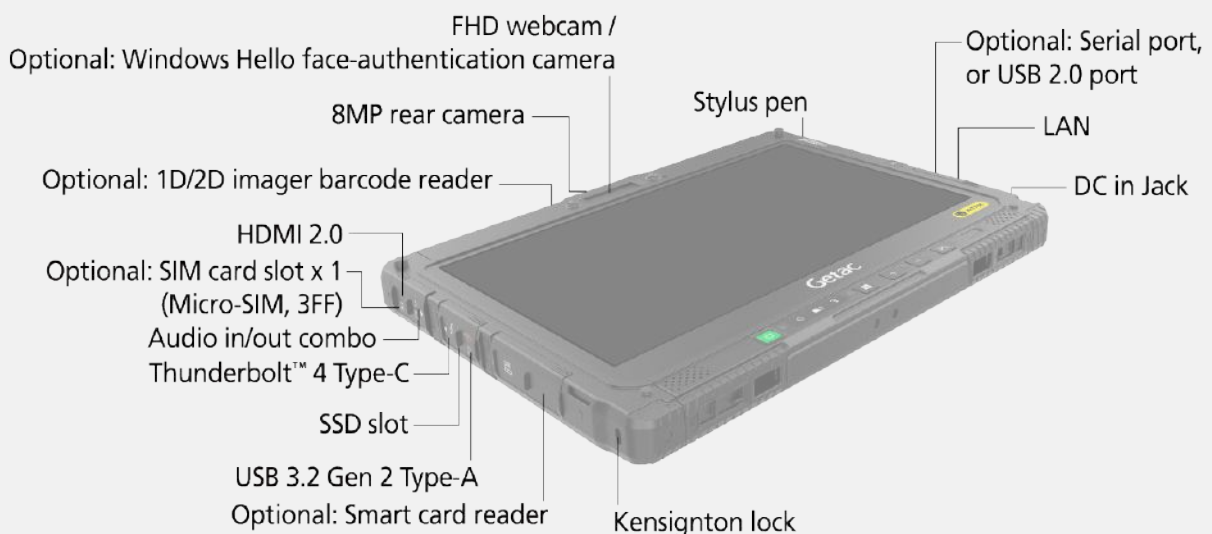

SPECIFICATIONS

Generation
G2-R

운영체제
Windows 11 Pro

CPU
Intel® Core™ i5-1135G7 Processor
Max. 4.2GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Platform options:
Intel® Core™ i5-1145G7 vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i7-1165G7 Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1185G7 vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

그래픽 컨트롤러
Intel® Iris® X^e Graphics

디스플레이
12.5" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
1,200 nits LumiBond® display with Getac sunlight readable technology

스토리지 & 메모리
16GB DDR4
옵션: 32GB / 64GB DDR4

256GB PCIe NVMe SSD
옵션: 512GB / 1TB / 2TB PCIe NVMe SSD

키보드
Power button
5 tablet programmable buttons

포인팅 장치
Touchscreen
Dual mode touchscreen (multi-touch and digitizer)

확장 슬롯
옵션: 1D/2D imager barcode reader
옵션: Serial port (9-pin; D-sub), or USB 2.0 port

I/O 인터페이스
FHD webcam x 1ⁱ
8M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 x 1
LAN (RJ-45) x 1
HDMI 2.0 x 1
옵션: SIM card slot x 1 (Micro-SIM, 3FF)ⁱⁱ
옵션: Windows Hello face-authentication camera (front-facing) x 1ⁱ

통신 인터페이스
10/100/1000 base-T Ethernet
Intel® Wi-Fi 6 AX201, 802.11ax
Bluetooth (v5.2)ⁱⁱⁱ
옵션: Dedicated GPS^{iv}
옵션: 4G LTE mobile broadband with integrated GPS^{iv,v}
옵션: 5G Sub-6 with integrated GPS^{xii, xiii}

보안 기능
TPM 2.0
Kensington lock
옵션: Intel® vPro® Technology
옵션: Smart card reader or HF RFID reader^{vi}
옵션: Windows Hello face-authentication camera (front-facing)ⁱ

전원
AC adapter (90W, 100-240VAC, 50/60Hz)
Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2

치수 & 무게
329.5 x 238 x 24mm (12.97" x 9.37" x 0.94")
1.76kg (3.88lbs)^{vii}

견고성
MIL-STD-810H certified
IP66 certified
Vibration & 6ft (1.8m) drop resistant^{viii}
ATEX & IECEx certified

사용가능 환경
Temperature^{ix}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F

Humidity :
- 95% RH, non-condensing

ATEX/IECEx Zone 2/22
Ex II 3G Ex ic op is IIC T4 Gc
Ex II 3D Ex ic op is IIIB T130°C Dc

소프트웨어
Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager^x
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
옵션: Absolute Persistence®

옵션 소프트웨어
Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Device Monitoring System (GDM5)
Getac VGPS Utility^{xi}

악세서리
Battery (11.1V, typical 2100mAh; min. 2040mAh)
AC adapter (90W, 100-240VAC)
Digitizer pen

옵션:
Battery (11.1V, typical 2100mAh; min. 2040mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
Digitizer pen
Anti-static protection film
Rotating hand strap with kickstand
Shoulder strap (2-point)
Spare SSD kit

K120-EX FULLY RUGGED TABLET

- I. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- II. Units with 4G LTE option comes with an embedded SIM card slot.
- III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IV. Dedicated GPS is mutually exclusive with 4G LTE mobile broadband. Supports GPS and Glonass.
- V. Units with 4G LTE option comes with an embedded SIM card slot.
- VI. Smart card reader and HF RFID reader are mutually exclusive options.
- VII. Weight and dimensions vary from configurations and optional accessories.
- VIII. Drop test results vary from configurations and optional accessories.
- IX. Tested by an independent third-party test lab following MIL-STD-810H.
- X. Available when barcode reader option is selected.
- XI. Models require either embedded or standalone GPS module.
- XII. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- XIII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.



(주)씨에스글로비즈
경기도 과천시 과천대로7길 65, 과천상상자이타워 B동 1220호
제품 문의 : 02)782-4700 / 기술 문의 : 02)782-7500
www.getac.co.kr / getac_sales@getac.co.kr