


ZX10 FULLY RUGGED TABLET



- Qualcomm® QCS6490, Octa-core Processor
- 10.1" LumiBond display with Getac sunlight readable technology (1,000 nits) and glove-enabled capacitive touchscreen
- Dual hot-swappable batteries for uninterrupted operation
- 6ft drop, MIL-STD-810H and IP66 certified
- Optional 1D/2D imager barcode reader
- Multiple configurations with enterprise-level management tools in a light form factor
- Verified as Android enterprise recommendedⁱ



ZX10 3D demo

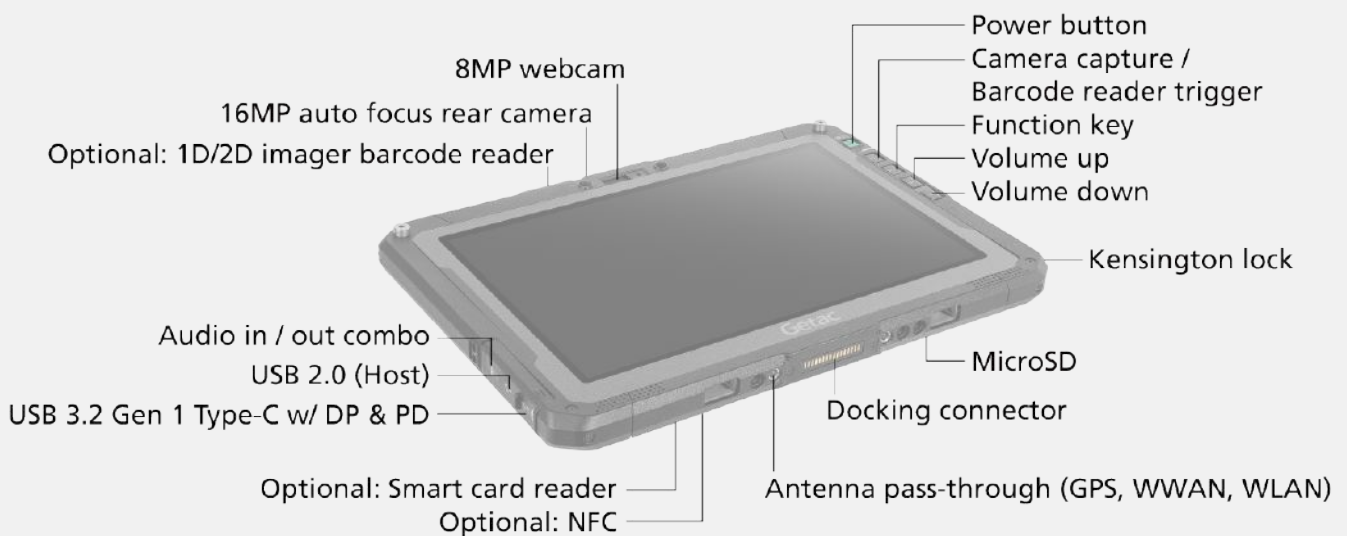

SPECIFICATIONS

운영 체제

Android™ 15.0ⁱ

CPU

Qualcomm® QCS6490, Octa-core 1.9GHz
Max. 2.7GHz

그래픽 컨트롤러

Qualcomm® Adreno™ 643 GPU

NPU

Qualcomm® Hexagon™ Processor,
up to 13 TOPS with 6th Qualcomm AI Engine

디스플레이

10.1" TFT LCD WUXGA (1920 x 1200)
Protection film
1,000 nits LumiBond display with Getac sunlight readable technology
Capacitive multi-touch screen

스토리지 & 메모리

8GB LPDDR5

128GB UFS

옵션: 256GB UFS

장치 버튼

Power button
4 tablet programmable buttons

포인팅 장치

Touchscreen
- Capacitive multi-touch screen
- 옵션: Dual mode touchscreen (multi-touch and digitizer)

오디오

Integrated stereo speakers
Integrated dual-array microphone

확장 슬롯

옵션: 1D/2D imager barcode reader
옵션: Smart card reader
옵션: NFCⁱⁱ

I/O 인터페이스

8MP webcam x 1
16MP auto focus rear camera x 1
Audio in/out combo x 1
USB 2.0 (Host) x 1
USB 3.2 Gen 1 Type-C w/ DP & PD x 1
MicroSD x 1
Docking connector x 1
옵션: SIM card slot x 1 (Nano-SIM, 4FF)^x
옵션: RF antenna pass-through for GPS, WWAN and WLAN

통신 인터페이스

Wi-Fi 6E 802.11ax
Bluetooth (v5.2)ⁱⁱⁱ
옵션: Dedicated L1/L5 GPS^v
옵션: 4G LTE mobile broadband^{iv}
옵션: 5G Sub-6^{iv}
옵션: Dual SIM (Nano-SIM 4FF and e-SIM)^{iv, x}

보안 기능

Kensington lock
옵션: NFCⁱⁱ
옵션: Smart card reader

전원

Li-ion battery (3.88V, typical 4990mAh; min. 4870mAh)
+ Battery bay cover
LifeSupport battery swappable technology

Swappable Battery Options:

1. Battery (3.88V, typical 4990mAh; min. 4870mAh) x 2
2. High capacity battery (3.88V, typical 9980mAh; min. 9740mAh) x 2

치수 & 무게

275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")
906g (1.99lbs)^{vi}

견고성

MIL-STD-810H certified
IP66 certified
Vibration & 6 feet (1.8m) drop resistant^{ix}
옵션: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)

사용가능 환경

Temperature^{vii}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

소프트웨어

Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac settings and Google applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, YouTube music, Google TV, Meet and Photos)
Getac Log Tool
Getac Diagnostic
Getac Monitoring (trial version) agent/SDK
Getac Management (trial version) agent/SDK

옵션:

Getac Driving Safety Utility
Getac Monitoring
Getac Management
Getac OEMConfig

악세서리

Battery (3.88V, typical 4990mAh; min. 4870mAh)

옵션:

Carry bag
Battery (3.88V, typical 4990mAh; min. 4870mAh)
High capacity battery (3.88V, typical 9980mAh; min. 9740mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
65W USB-C AC adapter
DC-DC vehicle adapter (65W, 11-32VDC)
Capacitive stylus with tether
Digitizer pen with tether
Protection film
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Rotating hand strap with kickstand
Hard handle
Office dock
Vehicle dock^{viii}
Keyboard dock

ZX10 FULLY RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz contactless NFC (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IV. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- V. Support GPS, GLONASS, Galileo and BeiDou.
- VI. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 140g.
- VII. When using AC power, the device operates in temperatures as low as -29°C (-20°F), as tested by an independent third-party laboratory following MIL-STD-810H standards. For battery-only operation, it functions down to -15°C (5°F) with one standard battery, -21°C (-6°F) with two standard batteries, and -29°C (-20°F) with two high-capacity batteries.
- VIII. Gamber Johnson and Havis vehicle docks are e-mark certified.
- IX. Drop test results vary from configurations and optional accessories.
- X. Units with 4G/5G option come with an embedded SIM card slot.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock (Pogo)
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	USB 2.0 x 2	USB 2.0 x 3
LAN	-	1
HDMI	-	1
RF Pass-through	옵션: RF antenna connector x 3 (GPS, WWAN, WLAN)	-
Kensington Lock	-	Kensington Lock x 1



(주)씨에스글로벌비즈

경기도 과천시 과천대로7길 65, 과천상상자이타워 B동 1220호

제품 문의 : 02)782-4700 / 기술 문의 : 02)782-7500

www.getac.co.kr / getac_sales@getac.co.kr