




X500 SERVER FULLY RUGGED NOTEBOOK

- Intel® Xeon® Processor E3-1505M v6
- 15.6" TFT LCD FHD with Getac QuadraClear® sunlight readable display
- Optional NVIDIA® Quadro® P2000 4GB discrete graphics controller
- Optional RAID expansion unit with up to 5TB storage capacity and RAID configurable 0,1,5



X500server 3D
demo

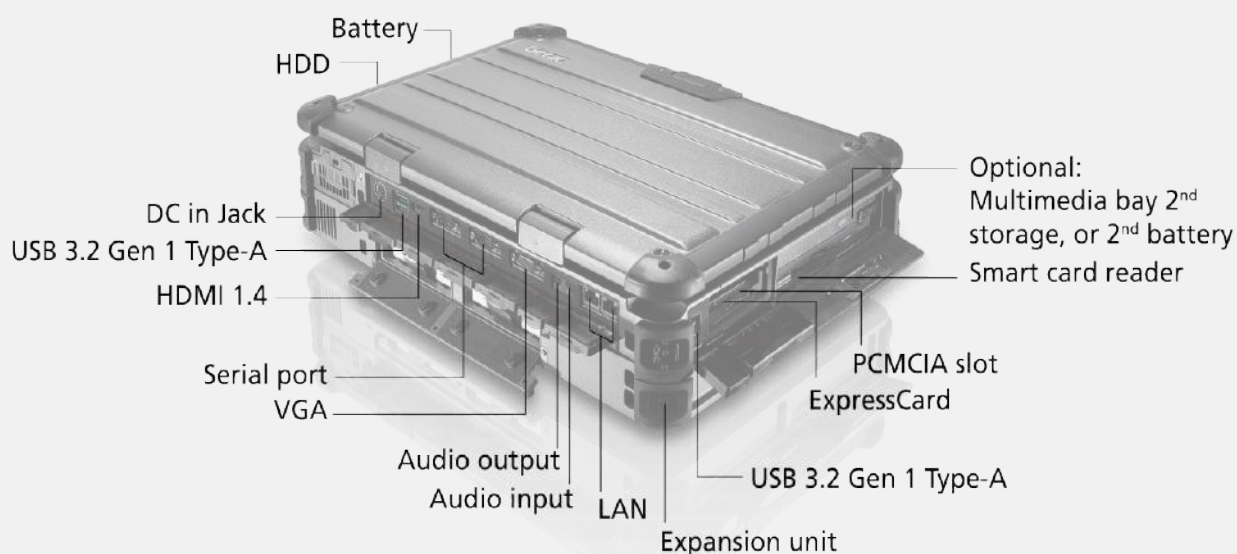

SPECIFICATIONS

운영체제
Windows Server 2019

CPU
Intel® Xeon® Processor E3-1505M v6 3.0GHz,
Max. 4.0GHz
– 8MB Intel® Smart Cache

그래픽 컨트롤러
Intel® HD Graphics P630
NVIDIA® GeForce® GTX1050 4GB discrete
graphics controller
옵션: NVIDIA® Quadro® P2000 4GB discrete
graphics controller

디스플레이
15.6" TFT LCD FHD (1920 x 1080)
Protection film
1,000 nits QuadraClear® sunlight readable
display

스토리지 & 메모리
32GB DDR4 / 32GB DDR4 ECC
옵션: 64GB DDR4 / 64GB DDR4 ECC

500GB SATA HDD / 512GB SATA SSD
옵션: 1TB SATA HDD
옵션: 1TB / 2TB SATA SSD
Disk management: RAID 0 / RAID 1ⁱ

키보드
LED backlit membrane keyboard with
integrated numeric keypad
옵션: LED backlit rubber keyboard

포인팅 장치
Touchpad
– Touchpad with two buttons

확장 슬롯
Smart card reader x 1
ExpressCard/54 x 1
PCMCIA Type II x 1

Multimedia Bay
2nd storage: HDD 500GB
옵션 2nd storage: 1TB HDD / 512GB SSD /
1TB / 2TB SSD
옵션 2nd battery ⁱⁱ: 10.8V, 9240mAh,
99.8Wh

X Bay
옵션: SATA HDD / SSD 3TB maximum
expandable to 5TB
Disk management: RAID 0, RAID 1, RAID 5

I/O 인터페이스
Audio input (Mini-jack) x 1
Audio output (Mini-jack) x 1
DC in Jack x 1
USB 3.2 Gen 1 Type-A x 4
LAN (RJ45) x 2
HDMI 1.4 x 1
External VGA (15-pin; D-sub) x 1
Serial port (9-pin; D-sub) x 2

통신 인터페이스
10/100/1000 base-T Ethernet
옵션: Dedicated GPS

보안 기능
TPM 2.0
Kensington lock
Intel® vPro™ Technology
Smart card reader

전원
AC adapter (150W, 100-240VAC, 50/60Hz)
Li-ion battery (10.8V, 9240mAh, 99.8Wh)
옵션: Multimedia bay 2nd Li-ion battery
(10.8V, 9240mAh, 99.8Wh)ⁱⁱ

치수 & 무게
410 x 320 x 65mm (16.1" x 12.6" x 2.5")
5.2kg (11.4lbs)ⁱⁱⁱ

410 x 320 x 119mm (16.1" x 12.6" x 4.6")^{iv}
8.6kg (18.9lbs)^{iii,iv}

건고성
MIL-STD-810H certified
IP65 certified
Vibration & drop resistant
Full magnesium alloy case
Shock-protected removable HDD

사용가능 환경
Temperature ^v:
– Operating^{vi}: -20°C to 55°C / -4°F to 131°F
– Storage: -40°C to 71°C / -40°F to 160°F
Humidity:
– 95% RH, non-condensing

소프트웨어
Getac Utility
Getac Geolocation
Adaptec Storage Manager™ ⁱⁱ
옵션: Absolute Persistence®

악세서리
Battery (10.8V, 9240mAh, 99.8Wh)
AC adapter (150W, 100-240VAC)

옵션:
Backpackⁱⁱ
Battery (10.8V, 9240mAh, 99.8Wh)
Multimedia bay 2nd Storage ⁱⁱ
Multimedia bay 2nd battery (10.8V, 9240mAh,
99.8Wh) ⁱⁱ
Multi-Bay charger (Dual-Bay)
AC adapter (150W, 100-240VAC)
Office dock AC adapter (150W, 100-240VAC)
Protection film
Spare SSD kit

X500 SERVER FULLY
RUGGED NOTEBOOK

- I. 2nd multimedia HDD is required for RAID 0, RAID 1 configuration.
- II. Software, hardware and accessories may vary depending on configuration.
- III. Weight and dimensions vary from configurations and optional accessories. Depth including hard handle.
- IV. Dimension measured with expansion unit.
- V. Tested by an independent third-party test lab following MIL-STD-810H. Recommend system boot-
up temperature below 40°C.
- VI. For X500 RAID expansion unit, the operating
temperature is -20°C to 45°C / -4°F to 113°F.

Information provided herewith is for reference only,
available specification shall be subjected to quotation by
request.



(주)씨에스글로벌비즈

서울시 영등포구 은행로 37, 기계회관 7층
제품 문의 : 02)782-4700 / 기술 문의 : 02)782-7500
http://www.getac.co.kr / sales@getac.co.kr