




X600 SERVER FULLY RUGGED NOTEBOOK

- 11세대 Intel® Xeon® W-11865MRE 프로세서
- 15.6" FHD LumiBond® display with Getac sunlight readable technology (1,000 nits) and optional capacitive touchscreen
- Enhanced enterprise security features with TPM 2.0, Kensington lock, triple user-replaceable storage and Smart card reader
- Versatile I/Os connectivity including Thunderbolt™ 4
- Expandable modules for additional ports, batteries, DVD super multi drive, and connectivity

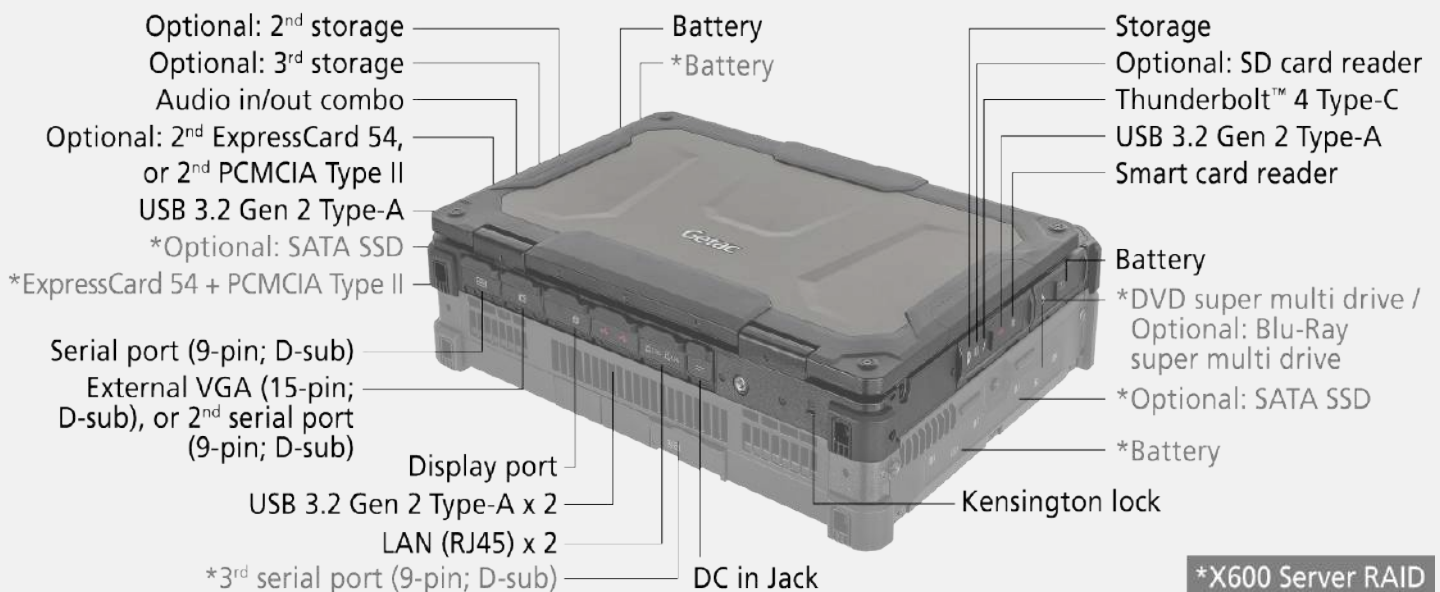

SPECIFICATIONS

운영체제
Windows Server 2022

CPU
Intel® Xeon® W-11865MRE vPro® Processor
Max. 4.9GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

그래픽 컨트롤러
Intel® UHD Graphics

디스플레이
15.6" TFT LCD FHD (1920 x 1080)
Protection film
1,000 nits LumiBond® display with Getac sunlight readable technology
옵션: Capacitive multi-touch screen

스토리지 & 메모리
32GB DDR4
옵션: 64GB / 128GB DDR4
1TB Enterprise PCIe SSD
옵션: 2TB Enterprise PCIe SSD
옵션: 2nd Storage: 1TB / 2TB Enterprise PCIe SSD
옵션: 3rd Storage: 1TB / 2TB Enterprise PCIe SSD
Disk management: RAID 5 ⁱ

키보드
LED backlit membrane keyboard with integrated numeric keypad

포인팅 장치
Touchscreen
- 옵션: Capacitive multi-touch screen
Touchpad
- Touchpad with two buttons

확장 슬롯
Smart card reader
옵션: ExpressCard 54 + PCMCIA Type II ⁱⁱ
옵션: 2nd ExpressCard 54 or 2nd PCMCIA Type II ⁱⁱⁱ
옵션: SD card reader

Multimedia Bay
옵션: DVD super multi drive ^{ii, iv} or Blu-Ray super multi drive ^{iv}

X Bay
옵션: Enterprise SATA SSD 4TB (1TB x 4) maximum expandable to 16TB (2TB x 8)
Disk management: RAID 0, RAID 1, RAID 5

I/O 인터페이스
5M webcam x 1
Thunderbolt™ 4 Type C x 1
USB 3.2 Gen 2 Type-A x 4
LAN (RJ-45) x 2
Audio in/out combo x 1
DC in Jack x 1
HDMI 2.0 x 1
Display port x 1
Serial port (9-pin; D-sub) x 1
External VGA (15-pin; D-sub) x 1 or 2nd Serial port (9-pin; D-sub) x 1 ^v
옵션: 3rd Serial port (9-pin; D-sub) x 1 ⁱⁱ

통신 인터페이스
2.5GBASE-T Ethernet

보안 기능
TPM 2.0
Kensington lock
Smart card reader
Intel® vPro® Technology

전원
AC adapter (230W, 100-240VAC, 50/60Hz)
Battery (10.8V, typical 6900mAh; min. 6600mAh) x 2
옵션: Battery (10.8V, typical 6900mAh; min. 6600mAh) x 2 ⁱⁱ

치수 & 무게
X600 Server:
412 x 322 x 52.5mm (16.22" x 12.68" x 2.07") ^{vii}
4.41kg (9.72lbs) ^{vi, vii}

X600 Server RAID:
412 x 322 x 108.8mm (16.22" x 12.68 x 4.28") ^{viii}
8.51kg (18.76lbs) ^{vi, viii}

견고성
MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified ^{ix}
Vibration and 3ft (0.9m) drop resistant ^x

사용가능 환경
Temperature ^{xi}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

소프트웨어
Getac Utility
옵션: Absolute Persistence®

악세서리
Battery (10.8V, typical 6900mAh; min. 6600mAh) x 2 ^{xii}
AC adapter (150W, 100-240VAC, 50/60Hz) ^{xii}
Capacitive stylus with tether

옵션:
Backpack
Battery (10.8V, typical 6900mAh; min. 6600mAh)
Multi-Bay charger (Dual-Bay)
Multimedia bay DVD super multi drive ^{ii, iv}
Multimedia bay Blu-Ray super multi drive ^{iv}
AC adapter (150W, 100-240VAC, 50/60Hz) ^{xiii}
AC adapter (230W, 100-240VAC, 50/60Hz) ^{ix}
MIL-STD-461 AC adapter (230W, 100-240VAC) ^{ix}
Capacitive stylus with tether
Protection film
Spare SSD kit ^{xiv}
X-Bay SSD kit ^{xv}

X600 SERVER FULLY RUGGED NOTEBOOK

- I. RAID 5 configuration will require 3 storages for X600 Server without RAID.
- II. Default spec in the X600 Server RAID
- III. The 2nd ExpressCard 54 and the 2nd PCMCIA Type II card readers are mutually exclusive.
- IV. DVD super multi drive and Blu-Ray super multi drive are mutually exclusive.
- V. The 2nd Serial port is optional and mutually exclusive with External VGA.
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Dimension for X600 Server
- VIII. Dimension for X600 Server RAID.
- IX. MIL-STD-461 230W sold separately.
- X. X600 Server without RAID can withstand 4ft drop.
- XI. Tested by an independent third-party test lab following MIL-STD-810H.
- XII. X600 Server RAID comes with 4 batteries and an AC adapter (230W, 100-240VAC, 50/60Hz).
- XIII. 150W AC Adapter is compatible with X600 Server.
- XIV. Spare SSD Kit is an enterprise PCIe SSD. Compatible with X600 Server and X600 Server RAID.
- XV. X-bay SSD Kit is an Enterprise SATA SSD. Compatible with X600 Server RAID.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.



(주)씨에스글로벌비즈
경기도 과천시 과천대로7길 65, 과천상상자이타워 B동 1220호
제품 문의 : 02)782-4700 / 기술 문의 : 02)782-7500
www.getac.co.kr / getac_sales@getac.co.kr