


V120 FULLY RUGGED LAPTOP



- AI-ready with the latest Intel® Core™ Ultra Processors (Series 2) and Intel® AI Boost technology
- 12.2" FHD LumiBond display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Versatile I/Os connectivity including two Thunderbolt™ 4 and docking solutions
- LifeSupport battery swappable technology
- Optional 1D/2D imager barcode reader and high-capacity batteries
- Wi-Fi 7 delivers superior data transfer speeds

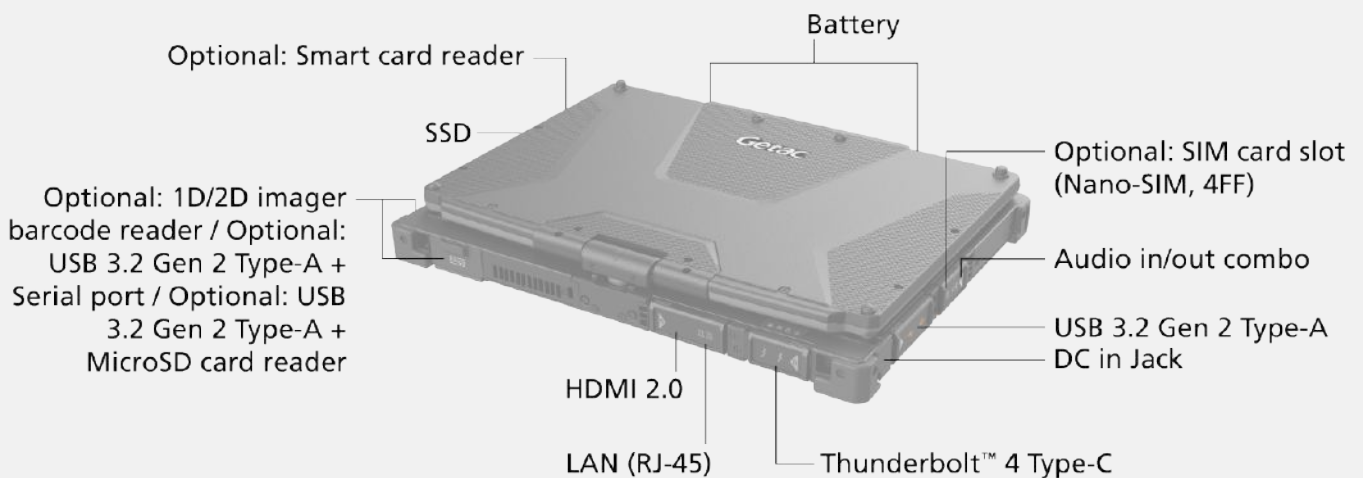

SPECIFICATIONS

운영 체제

Windows 11 Pro

CPU

Intel® Core™ Ultra 5 processor 225H
Max. 4.9GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Platform options:

Intel® Core™ Ultra 5 processor 235H, vPro® Enterprise
Max. 5.0GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 255H
Max. 5.1GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 265H, vPro® Enterprise
Max. 5.3GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache

그래픽 컨트롤러

Intel® Arc™ 130V GPU (For Intel® Core™ Ultra 5 processor) ⁱ
Intel® Arc™ 140V GPU (For Intel® Core™ Ultra 7 processor) ⁱ

NPV

Intel® AI Boost

디스플레이

12.2" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)
Protection film
1,000 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

스토리지 & 메모리

16GB DDR5
옵션: 32GB / 64GB DDR5

256GB PCIe NVMe SSD
옵션: 512GB / 1TB / 2TB PCIe NVMe SSD

키보드

LED backlit membrane keyboard
Power button
4 programmable buttons

포인팅 장치

Touchscreen
- Capacitive multi-touch screen
- 옵션: Dual mode touchscreen (multi-touch and digitizer)
Touchpad
- Glide touchpad with left-click and right-click buttons

오디오

Integrated stereo speakers
Integrated dual-array microphone

확장 슬롯

옵션: Smart card reader
옵션: 1D/2D imager barcode reader ⁱⁱ
옵션: USB 3.2 Gen 2 Type-A + Serial port (9-pin; D-sub) ⁱⁱ
옵션: USB 3.2 Gen 2 Type-A + MicroSD ⁱⁱ

I/O 인터페이스

5MP webcam x 1 ⁱⁱⁱ
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 2
Thunderbolt™ 4 Type-C x 2
LAN (RJ45) x 1
HDMI 2.0 x 1
Docking connector x 1
옵션: SIM card slot x 1 (Nano-SIM, 4FF) ^{iv, v}
옵션: Windows Hello face-authentication
5MP camera (front-facing) x 1 ⁱⁱⁱ
옵션: Tri RF antenna pass-through
for 4G (GPS, WLAN, WWAN)
옵션: Quad RF antenna pass-through
for 5G (GPS, WLAN, WWAN, WWAN MIMO)
옵션: 13MP auto focus rear camera x 1

통신 인터페이스

10/100/1000 base-T Ethernet
Intel® Wi-Fi 7 BE200, 802.11be
Bluetooth (v5.4) ^{vi}
옵션: Dedicated GPS with L1/L5 ^{vii}
옵션: 4G LTE mobile broadband with integrated GPS ^{iv, viii}
옵션: 5G Sub-6 with integrated GPS ^{iv, viii}
옵션: Dual SIM (Nano-SIM 4FF and e-SIM) ^{iv, v}

보안 기능

TPM 2.0
Kensington lock
Smart card reader
옵션: Intel® vPro® Technology
옵션: Fingerprint reader
옵션: HF RFID reader ^{ix}
옵션: Windows Hello face-authentication
5MP camera (front-facing) ⁱⁱⁱ
옵션: Absolute Persistence ^x

전원

AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery (7.74V, typical 4070mAh; min. 3800mAh) x 2
LifeSupport battery swappable technology
옵션: High-capacity Li-ion battery
(11.61V, typical 4070mAh; min. 3800mAh) x 2

치수 & 무게

302 x 224 x 35.7mm (11.89" x 8.82" x 1.41")
2.1kg (4.63lbs) ^x

견고성

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified ^{xi}
Vibration & 4ft (1.2m) drop resistant ^{xii}
옵션: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D) ^{xiii}
옵션: Salt fog certified

사용가능 환경

Temperature ^{xiv}
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

소프트웨어

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager ^{xv}
옵션: Absolute Secure Endpoint
옵션: Absolute Secure Access

옵션:

Getac Driving Safety Utility
Getac Monitoring
Getac VGPS Utility ^{xvi}

악세서리

Battery (7.74V, typical 4070mAh; min. 3800mAh)
AC adapter (65W, 100-240VAC)

옵션:

Carry bag
Battery (7.74V, typical 4070mAh; min. 3800mAh)
High-capacity Li-ion battery
(11.61V, typical 4070mAh; min. 3800mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
ML-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen
Capacitive stylus with tether
Protection film
Handle
Hard handle
Hand strap
Shoulder strap (2-point)
Vehicle cradle ^{xvii}
Vehicle dock ^{xviii}
Spare SSD kit
65W Type-C adapter
100W Type-C adapter
Getac rugged keyboard
Getac DS100 USB-C docking station with AC adapter

V120 FULLY RUGGED LAPTOP

- I. Units equipped with 16GB and dual channel memory come with Intel® Arc™ Graphics.
- II. Optional USB 3.2 Gen 2 Type-A + Serial port (9-pin; D-sub), optional USB 3.2 Gen 2 Type-A + Micro SD card reader, and optional 1D/2D imager barcode reader are mutually exclusive.
- III. 5MP webcam and optional Windows Hello face-authentication 5MP camera (front-facing) are mutually exclusive options.
- IV. Units with 4G/5G LTE option come with an embedded SIM card slot.
- V. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- VIII. Only available in the US, UK, EU, Australia and New Zealand.
- IX. 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- X. Weight and dimensions vary from configurations and optional accessories.
- XI. MIL-STD-461 90W AC adapter sold separately.
- XII. Drop test results vary from configurations and optional accessories.
- XIII. Available with limited configurations and environment conditions.
- XIV. Tested by an independent third-party test lab following MIL-STD-810H.
- XV. Available when the barcode reader option is selected.
- XVI. Models require either embedded or standalone GPS module.
- XVII. Gamber-Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Vehicle Dock

Port	Count
Serial Port	2
External VGA	1
Microphone	1
Audio Output	1
DC in Jack	1
USB	4
LAN	1
HDMI	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)



(주)씨에스글로벌비즈

경기도 과천시 과천대로7길 65, 과천상상자이타워 B동 1220호

제품 문의 : 02)782-4700 / 기술 문의 : 02)782-7500

www.getac.co.kr / getac_sales@getac.co.kr